


Wheel washing system

MobyDick ConLine KIT Flex 800 MB

Art. no. MDK-A300-800MB

Two mobile, galvanized, water-bearing wash units with splash guard walls, pump sump tanks, recycling tanks, pump technology, solid concrete ramps, and a control system.

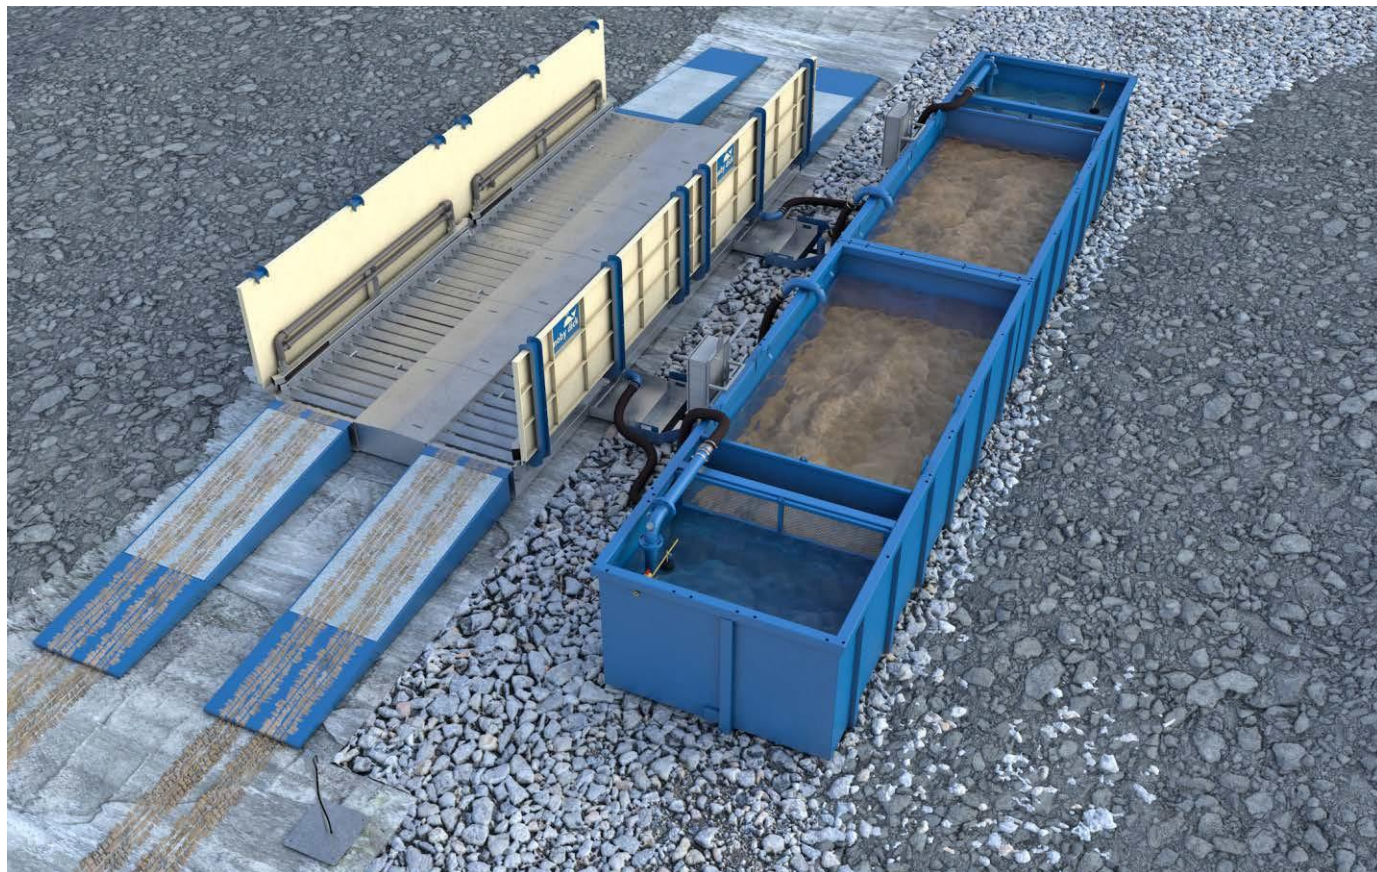

KIT Flex 800 MB – A model from the ConLine KIT Flex range

ConLine KIT Flex – The modular concept for the construction industry

The wheel washing systems of the ConLine KIT Flex line were developed by our engineers specifically for the needs of the construction industry. The basic unit of the modular concept consists of a robust 158 inch long wash unit and a recycling tank. It can be combined with a scraper conveyor, a mobility package or a second basic unit to form eight different wheel washing systems that are 158 or 316 inch in length. All models can be installed quickly and impress thousands of operators around the world.

Function description

A truck drives slowly up the ramps into the wheel washing system. The vehicle identification sensor automatically triggers the washing process. The specially coordinated nozzle system, consisting of a large number of bottom and side nozzles, then ensures the intensive cleaning of all tires and the entire chassis in two wheel rotations. Higher vehicle areas such as windows and rear-view mirrors are not washed, to leave the driver's field of vision clear. The kneading effect created by the angle profiles gives the tire profiles additional cleaning. The duration of the washing process can be freely selected using the timer relay in the control cabinet, in accordance with the relevant operating conditions. The waste water runs via the return channel from the wash units to the side pump sump tanks. From there it is pumped into the recycling tanks by a MobyPump agitator pump. This is where the washed-off solids settle out. The water is fed under a surge wall and over the partition wall with sieve insert into the pump chamber. There it is reused by a robust MobyPump submersible pump for further spraying. An excavator or suction vehicle removes the settled solids from the recycling tanks.




Water recycling

In all MobyDick wheel washing systems the water is circulated in a closed circuit. Water treatment is via sedimentation in the recycling tank. Sedimentation can be accelerated by adding a flocculant. The solids that settle out in the recycling tank should be extracted with an excavator or suctioned out with a suction vehicle at regular intervals (depending on how frequently the system is used).

Specifications (Dimensions see layout)

• Drive-through length	316 in
• Passage width	110 in
• Maximum axle load	16.5 tons
• Splash guard wall height	54 in
• Nozzles	2x130 pcs
• Nozzle Ø	0.28 in
• Recycling tank volume	2x4760 gal
• Maximum pumping capacity	4x660 gal/min
• Electrical connection value	30.0 HP
• Sound emission	< 75 dB
• Weight (ready to ship)	24.8 tons

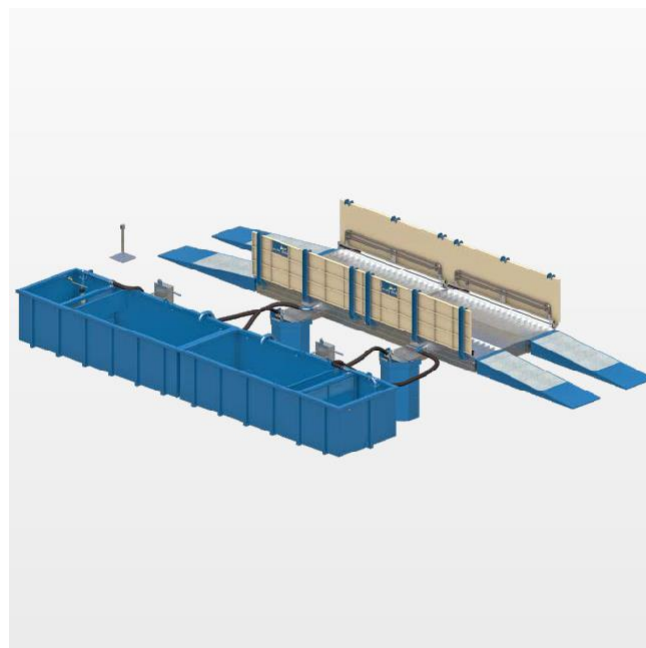

Scope of supply

- 2x1 Galvanized, water-bearing wash unit
- Splash guard wall per side
- 2x1 Double side nozzle bars per side
- 2x1 Galvanized return channel for the waste water
- 2x1 Control cabinet with connection cable
- Optical sensor to trigger the washing process
- 2x1 MobyPump submersible pump
- 2x1 MobyPump agitator pump
- Pump bracket and piping
- 2x1 Recycling tank 20 B
- 2x1 Pump sump tank
- 4 Ramps to the wash units

Fields of application

The KIT Flex 800 MB model can wash up to 150 highly soiled trucks per day.

Typical operation sites – depending on the number of trucks and degree of soiling – are

- Construction sites
- Gravel pits and quarries
- Concrete mixing plants
- Recycling facilities
- Landfill sites
- Port facilities
- Food industry
- Cleaning and disinfection
- Other areas on request