


Third nozzle tube

Option Code: [-3NOZ-]

Third nozzle tube for cleaning the wheel housings.

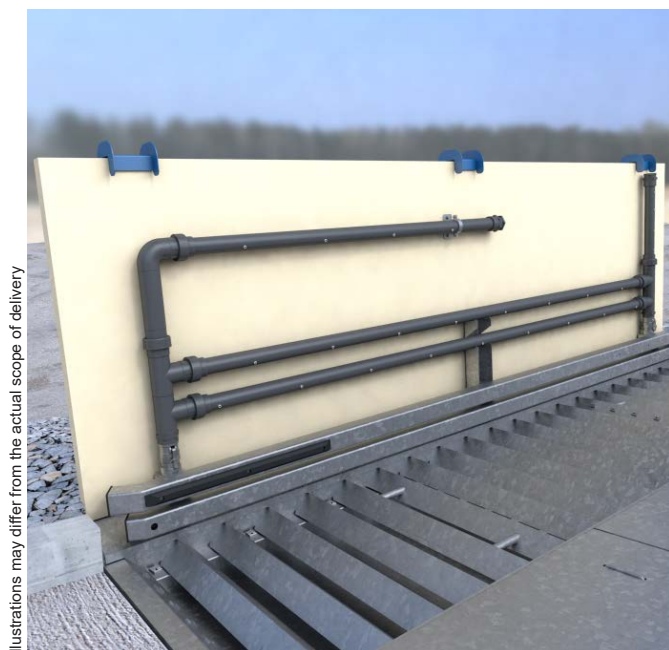

Function

The special side spraying with three horizontal and one vertical nozzle tube each is used instead of the conventional double nozzle bars. This increases the spray pattern and better cleans the wheel housings.

All nozzle tubes are adjustable thanks to detachable fittings. The spraying angle can thus be adjusted according to the requirements at hand.

Galvanised version on request.

Technical description

Two PVC side nozzle bars with three nozzle tubes each in vertical and horizontal alignment. The assembly is done using quick couplings. No additional pump is required.

Specifications

Side nozzle bars

| | |
|--------------------------------|-----|
| • Material | PVC |
| • Horizontal nozzle tubes/side | 3 |
| • Vertical nozzle tubes/side | 1 |
| • Number of nozzles/side | 25 |

General scope of supply

- 2 side nozzle bars each with 3 nozzle tubes
- 4 quick couplings 2"
- Mounting material