


Side-wall displacement

Option Code: [-EXCW-]

Extensions for mounting the side walls and nozzle bars offset towards the exterior.

Illustrations may differ from the actual scope of delivery

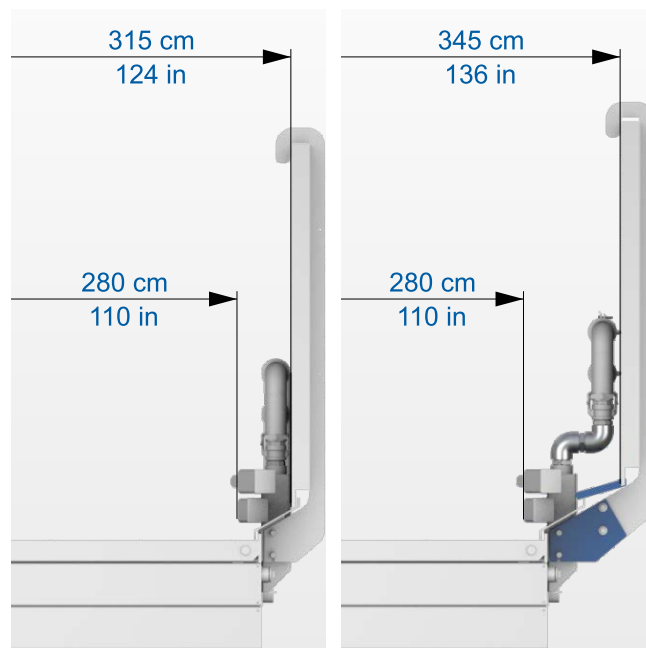

Function

If a vehicle cannot drive through a wheel washing system at the ideal angle due to tight spaces or curves, the risk of damage to the nozzle bars and side walls is greater.

By shifting the side walls and the nozzle bars outwards by 30 cm, the clearance between the side walls is increased. The passage width remains unchanged.

Technical description

Four hot-dip galvanised nozzle bar adapters made of steel. Two water deflectors made of steel and adapters for offset mounting of the side wall brackets painted in Traffic blue (RAL 5017) and various fixing materials.

Specifications

Water deflector, adapter for side wall support

- Material Steel
- Colour Traffic blue (RAL 5017)

Nozzle bar adapter

- Material Hot-dip galvanised steel
- Changing the internal spacing of the side walls 30 cm
- Change of the passage width —

General scope of supply

- 1 water deflector per washing element
- Adapter for side wall support
- Nozzle bar adapter
- Mounting material