



ConLine KIT Flex

The modular concept for the construction industry




www.mobydick.com

Wheel washing system

MobyDick ConLine KIT Flex 400 B

Art. no. MDK-A300-400B

Galvanized, water-bearing wash unit with splash guard walls, recycling tank, pump technology, and a control system.

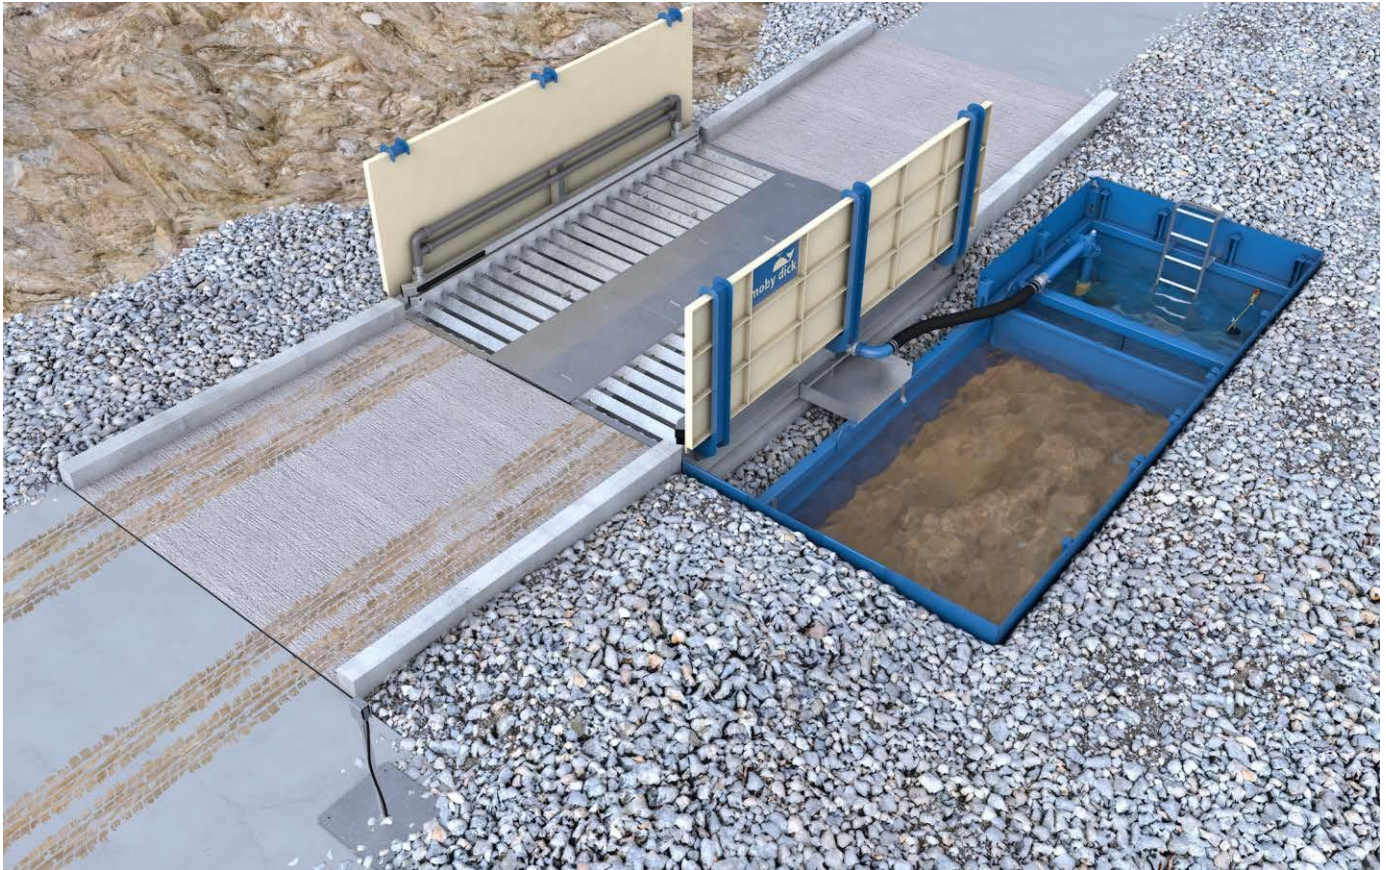

KIT Flex 400 B – A model from the ConLine KIT Flex range

ConLine KIT Flex – The modular concept for the construction industry

The wheel washing systems of the ConLine KIT Flex line were developed by our engineers specifically for the needs of the construction industry. The basic unit of the modular concept consists of a robust 158 inch long wash unit and a recycling tank. It can be combined with a scraper conveyor, a mobility package or a second basic unit to form eight different wheel washing systems that are 158 or 316 inch in length. All models can be installed quickly and impress thousands of operators around the world.

Function description

A truck drives slowly into the wheel washing system. The vehicle identification sensor automatically triggers the washing process. The specially coordinated nozzle system, consisting of a large number of bottom and side nozzles, then ensures the intensive cleaning of all tires and the entire chassis in one wheel rotation. Higher vehicle areas such as windows and rear-view mirrors are not washed, to leave the driver's field of vision clear. The kneading effect created by the angle profiles gives the tire profiles additional cleaning. The duration of the washing process can be freely selected using the timer relay in the control cabinet, in accordance with the relevant operating conditions. The waste water runs via the return channel from the wash unit to the side recycling tank. This is where the washed-off solids settle out. The water is fed under a surge wall and over the partition wall with sieve insert into the pump chamber. There it is reused by a robust MobyPump submersible pump for further spraying. An excavator or suction vehicle removes the settled solids from the recycling tank.




Water recycling

In all MobyDick wheel washing systems the water is circulated in a closed circuit. Water treatment is via sedimentation in the recycling tank. Sedimentation can be accelerated by adding a flocculant. The solids that settle out in the recycling tank should be extracted with an excavator or suctioned out with a suction vehicle at regular intervals (depending on how frequently the system is used).

Specifications (Dimensions see layout)

• Drive-through length	158 in
• Passage width	110 in
• Maximum axle load	16.5 tons
• Splash guard wall height	54 in
• Nozzles	130 pcs
• Nozzle Ø	0.28 in
• Recycling tank volume	4760 gal
• Maximum pumping capacity	2x660 gal/min
• Electrical connection value	15.0 HP
• Sound emission	< 75 dB
• Weight (ready to ship)	6.6 tons

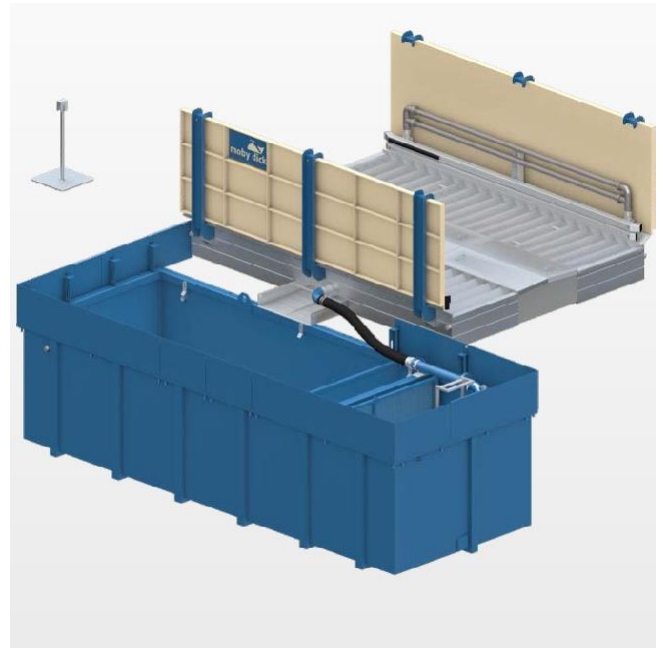

Scope of supply

- Galvanized, water-bearing wash unit
- Splash guard wall per side
- Double side nozzle bars per side
- Galvanized return channel for the waste water
- Control cabinet
- Optical sensor to trigger the washing process
- 2 MobyPump submersible pumps
- Pump bracket and piping
- Recycling tank 20 B with entry ladder
- Rim elevation on recycling tank to end at ground level

Fields of application

The KIT Flex 400 B model can wash up to 150 moderately soiled trucks per day.

Typical operation sites – depending on the number of trucks and degree of soiling – are

- Construction sites
- Gravel pits and quarries
- Concrete mixing plants
- Recycling facilities
- Landfill sites
- Port facilities
- Food industry
- Cleaning and disinfection
- Other areas on request

Wheel washing system

MobyDick ConLine KIT Flex 400 C

Art. no. MDK-A300-400C

Galvanized, water-bearing wash unit with splash guard walls, recycling tank with scraper conveyor, pump technology, and a control system.




KIT Flex 400 C – A model from the ConLine KIT Flex range

ConLine KIT Flex – The modular concept for the construction industry

The wheel washing systems of the ConLine KIT Flex line were developed by our engineers specifically for the needs of the construction industry. The basic unit of the modular concept consists of a robust 158 inch long wash unit and a recycling tank. It can be combined with a scraper conveyor, a mobility package or a second basic unit to form eight different wheel washing systems that are 158 or 316 inch in length. All models can be installed quickly and impress thousands of operators around the world.

Function description

A truck drives slowly into the wheel washing system. The vehicle identification sensor automatically triggers the washing process. The specially coordinated nozzle system, consisting of a large number of bottom and side nozzles, then ensures the intensive cleaning of all tires and the entire chassis in one wheel rotation. Higher vehicle areas such as windows and rear-view mirrors are not washed, to leave the driver's field of vision clear. The kneading effect created by the angle profiles gives the tire profiles additional cleaning. The duration of the washing process can be freely selected using the timer relay in the control cabinet, in accordance with the relevant operating conditions. The waste water runs from the wash unit directly into the recycling tank below. This is where the washed-off solids settle out. The water is fed via the partition wall with sieve insert into the pump chamber. There it is reused by a robust MobyPump submersible pump for further spraying. The scraper conveyor conveys settled solids out of the recycling tank.

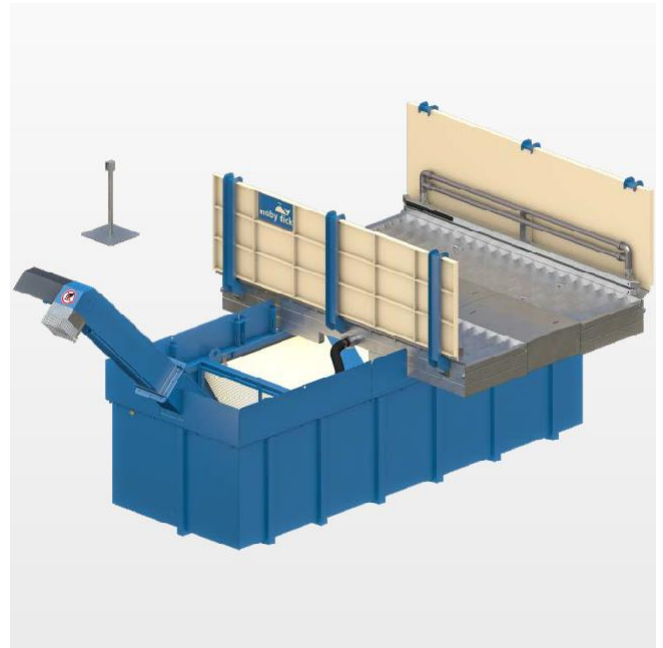

Water recycling

In all MobyDick wheel washing systems the water is circulated in a closed circuit. Water treatment is via sedimentation in the recycling tank. Sedimentation can be accelerated by adding a flocculant. Settled solids are continuously conveyed out of the recycling tank by the scraper conveyor.

Scope of supply

- Galvanized, water-bearing wash unit
- Splash guard wall per side
- Double side nozzle bars per side
- Control cabinet
- Optical sensor to trigger the washing process
- 2 MobyPump submersible pumps
- Pump bracket and piping
- Recycling tank 20 C with scraper conveyor
- Rim elevation on recycling tank to end at ground level

Specifications (Dimensions see layout)

• Drive-through length	158 in
• Passage width	110 in
• Maximum axle load	16.5 tons
• Splash guard wall height	54 in
• Nozzles	130 pcs
• Nozzle Ø	0.28 in
• Recycling tank volume	4760 gal
• Maximum pumping capacity	2x660 gal/min
• Electrical connection value	15.0 HP
• Sound emission	< 75 dB
• Weight (ready to ship)	7.2 tons

Fields of application

The KIT Flex 400 C model can wash up to 150 moderately soiled trucks per day.

Typical operation sites – depending on the number of trucks and degree of soiling – are

- Construction sites
- Gravel pits and quarries
- Concrete mixing plants
- Recycling facilities
- Landfill sites
- Port facilities
- Food industry
- Cleaning and disinfection
- Other areas on request

Wheel washing system

MobyDick ConLine KIT Flex 400 MB

Art. no. MDK-A300-400MB

Mobile, galvanized, water-bearing wash unit with splash guard walls, pump sump tank, recycling tank, pump technology, solid concrete ramps, and a control system.



KIT Flex 400 MB – A model from the ConLine KIT Flex range

ConLine KIT Flex – The modular concept for the construction industry

The wheel washing systems of the ConLine KIT Flex line were developed by our engineers specifically for the needs of the construction industry. The basic unit of the modular concept consists of a robust 158 inch long wash unit and a recycling tank. It can be combined with a scraper conveyor, a mobility package or a second basic unit to form eight different wheel washing systems that are 158 or 316 inch in length. All models can be installed quickly and impress thousands of operators around the world.

Function description

A truck drives slowly up the ramps into the wheel washing system. The vehicle identification sensor automatically triggers the washing process. The specially coordinated nozzle system, consisting of a large number of bottom and side nozzles, then ensures the intensive cleaning of all tires and the entire chassis in one wheel rotation. Higher vehicle areas such as windows and rear-view mirrors are not washed, to leave the driver's field of vision clear. The kneading effect created by the angle profiles gives the tire profiles additional cleaning. The duration of the washing process can be freely selected using the timer relay in the control cabinet, in accordance with the relevant operating conditions. The waste water runs via the return channel from the wash unit to the side pump sump tank. From there it is pumped into the recycling tank by the MobyPump agitator pump. This is where the washed-off solids settle out. The water is fed under a surge wall and over the partition wall with sieve insert into the pump chamber. There it is recycled for further spraying by a robust MobyPump submersible pump. An excavator or suction vehicle removes the settled solids from the recycling tank.




Water recycling

In all MobyDick wheel washing systems the water is circulated in a closed circuit. Water treatment is via sedimentation in the recycling tank. Sedimentation can be accelerated by adding a flocculant. The solids that settle out in the recycling tank should be extracted with an excavator or suctioned out with a suction vehicle at regular intervals (depending on how frequently the system is used).

Specifications (Dimensions see layout)

• Drive-through length	158 in
• Passage width	110 in
• Maximum axle load	16.5 tons
• Splash guard wall height	54 in
• Nozzles	130 pcs
• Nozzle Ø	0.28 in
• Recycling tank volume	4760 gal
• Maximum pumping capacity	2x660 gal/min
• Electrical connection value	15.0 HP
• Sound emission	< 75 dB
• Weight (ready to ship)	16.0 tons

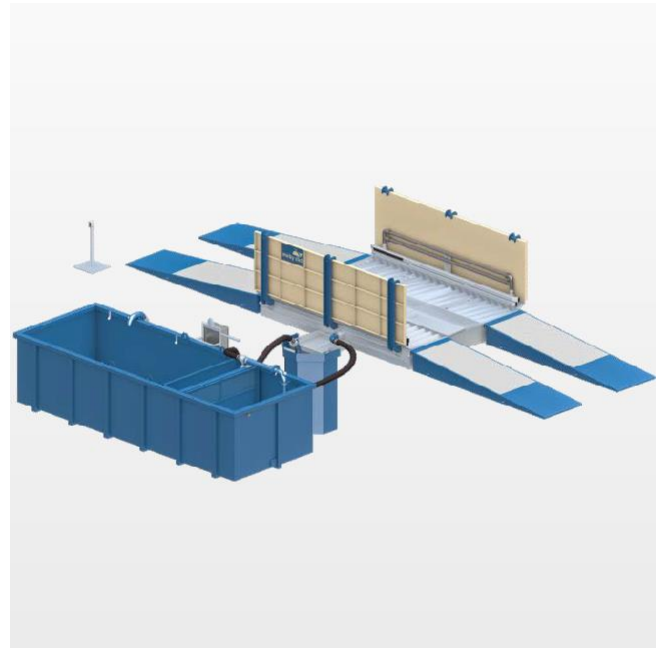

Scope of supply

- Galvanized, water-bearing wash unit
- Splash guard wall per side
- Double side nozzle bars per side
- Galvanized return channel for the waste water
- Control cabinet
- Optical sensor to trigger the washing process
- 1 MobyPump submersible pump
- 1 MobyPump agitator pump
- Pump bracket and piping
- Recycling tank 20 B
- Pump sump tank
- 4 Ramps to the wash unit

Fields of application

The KIT Flex 400 MB model can wash up to 100 moderately soiled trucks per day.


Typical operation sites – depending on the number of trucks and degree of soiling – are

- Construction sites
- Gravel pits and quarries
- Concrete mixing plants
- Recycling facilities
- Landfill sites
- Port facilities
- Food industry
- Cleaning and disinfection
- Other areas on request

Wheel washing system MobyDick ConLine KIT Flex 400 MC

Art. no. MDK-A300-400MC

Mobile, galvanized, water-bearing wash unit with splash guard walls, pump sump tank, recycling tank with scraper conveyor, pump technology, solid concrete ramps, and a control system.

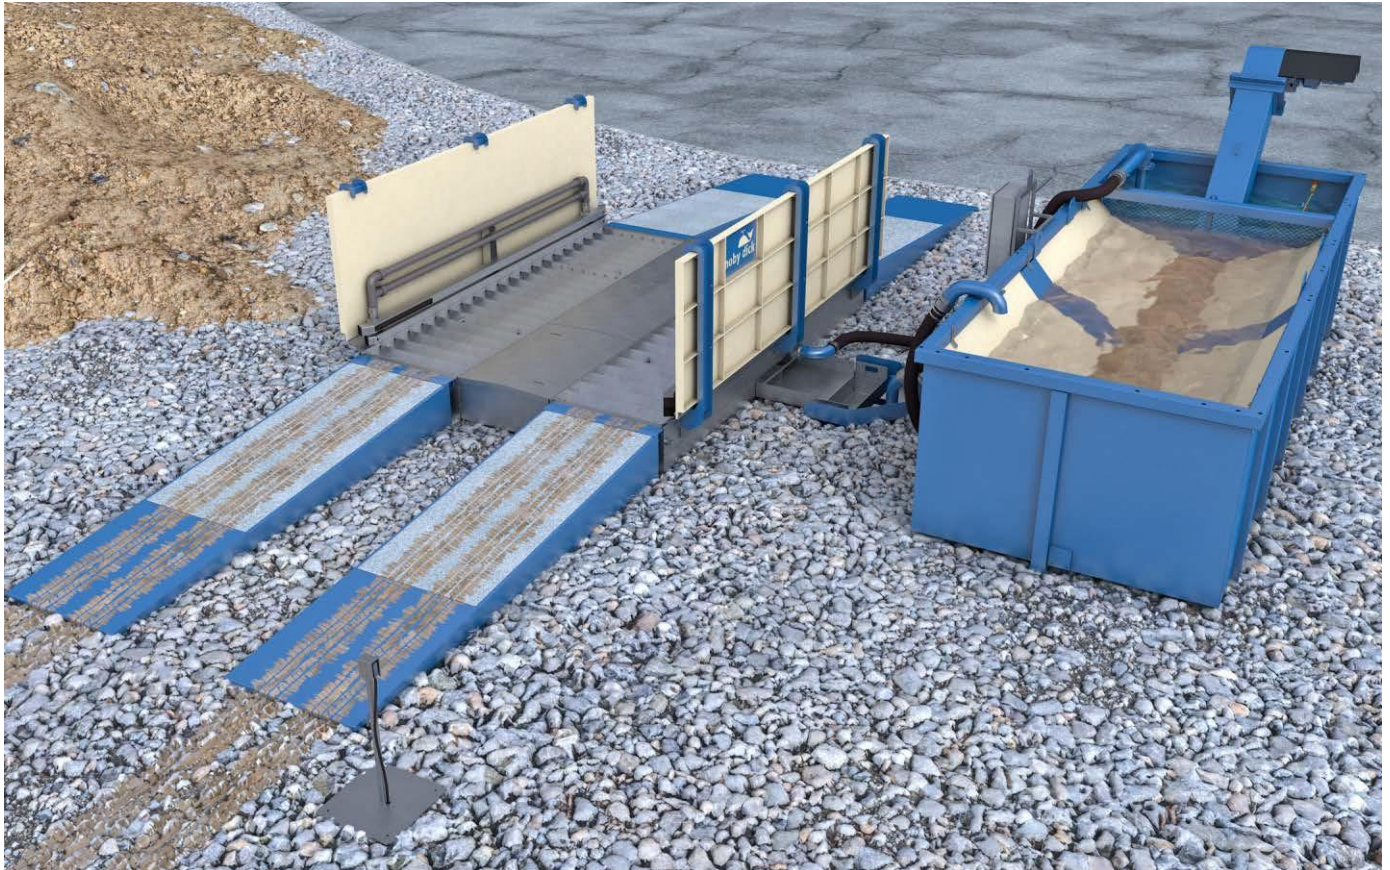


KIT Flex 400 MC – A model from the ConLine KIT Flex range

ConLine KIT Flex – The modular concept for the construction industry

The wheel washing systems of the ConLine KIT Flex line were developed by our engineers specifically for the needs of the construction industry. The basic unit of the modular concept consists of a robust 158 inch long wash unit and a recycling tank. It can be combined with a scraper conveyor, a mobility package or a second basic unit to form eight different wheel washing systems that are 158 or 316 inch in length. All models can be installed quickly and impress thousands of operators around the world.

Function description

A truck drives slowly up the ramps into the wheel washing system. The vehicle identification sensor automatically triggers the washing process. The specially coordinated nozzle system, consisting of a large number of bottom and side nozzles, then ensures the intensive cleaning of all tires and the entire chassis in one wheel rotation. Higher vehicle areas such as windows and rear-view mirrors are not washed, to leave the driver's field of vision clear. The kneading effect created by the angle profiles gives the tire profiles additional cleaning. The duration of the washing process can be freely selected using the timer relay in the control cabinet, in accordance with the relevant operating conditions. The waste water runs via the return channel from the wash unit to the side pump sump tank. From there it is pumped into the recycling tank by the MobyPump agitator pump. This is where the washed-off solids settle out. The water is fed via the partition wall with sieve insert into the pump chamber. There it is recycled for further spraying by a robust MobyPump submersible pump. The scraper conveyor conveys settled solids out of the recycling tank.

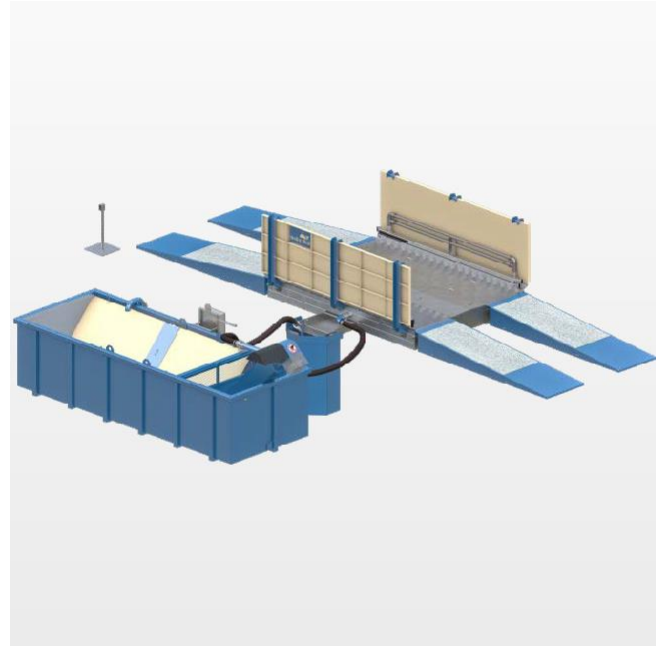

Water recycling

In all MobyDick wheel washing systems the water is circulated in a closed circuit. Water treatment is via sedimentation in the recycling tank. Sedimentation can be accelerated by adding a flocculant. Settled solids are continuously conveyed out of the recycling tank by the scraper conveyor.

Scope of supply

- Galvanized, water-bearing wash unit
- Splash guard wall per side
- Double side nozzle bars per side
- Galvanized return channel for the waste water
- Control cabinet
- Optical sensor to trigger the washing process
- 1 MobyPump submersible pump
- 1 MobyPump agitator pump
- Pump bracket and piping
- Recycling tank 20 C with scraper conveyor
- Pump sump tank
- 4 Ramps to the wash unit

Specifications (Dimensions see layout)

• Drive-through length	158 in
• Passage width	110 in
• Maximum axle load	16.5 tons
• Splash guard wall height	54 in
• Nozzles	130 pcs
• Nozzle Ø	0.28 in
• Recycling tank volume	4760 gal
• Maximum pumping capacity	2x660 gal/min
• Electrical connection value	15.4 HP
• Sound emission	< 75 dB
• Weight (ready to ship)	16.5 tons

Fields of application

The KIT Flex 400 MC model can wash up to 100 moderately soiled trucks per day.

Typical operation sites – depending on the number of trucks and degree of soiling – are

- Construction sites
- Gravel pits and quarries
- Concrete mixing plants
- Recycling facilities
- Landfill sites
- Port facilities
- Food industry
- Cleaning and disinfection
- Other areas on request

Wheel washing system MobyDick ConLine KIT Flex 800 B

Art. no. MDK-A300-800B

Two galvanized, water-bearing wash units with splash guard walls, recycling tanks, pump technology, and a control system.



KIT Flex 800 B – A model from the ConLine KIT Flex range

ConLine KIT Flex – The modular concept for the construction industry

The wheel washing systems of the ConLine KIT Flex line were developed by our engineers specifically for the needs of the construction industry. The basic unit of the modular concept consists of a robust 158 inch long wash unit and a recycling tank. It can be combined with a scraper conveyor, a mobility package or a second basic unit to form eight different wheel washing systems that are 158 or 316 inch in length. All models can be installed quickly and impress thousands of operators around the world.

Function description

A truck drives slowly into the wheel washing system. The vehicle identification sensor automatically triggers the washing process. The specially coordinated nozzle system, consisting of a large number of bottom and side nozzles, then ensures the intensive cleaning of all tires and the entire chassis in two wheel rotations. Higher vehicle areas such as windows and rear-view mirrors are not washed, to leave the driver's field of vision clear. The kneading effect created by the angle profiles gives the tire profiles additional cleaning. The duration of the washing process can be freely selected using the timer relay in the control cabinet, in accordance with the relevant operating conditions. The waste water runs via the return channel from the wash units to the recycling tanks on the side. This is where the washed-off solids settle out. The water is fed under a surge wall and over the partition wall with sieve insert into the pump chamber. There it is reused by a robust MobyPump submersible pump for further spraying. An excavator or suction vehicle removes the settled solids from the recycling tanks.




Water recycling

In all MobyDick wheel washing systems the water is circulated in a closed circuit. Water treatment is via sedimentation in the recycling tank. Sedimentation can be accelerated by adding a flocculant. The solids that settle out in the recycling tank should be extracted with an excavator or suctioned out with a suction vehicle at regular intervals (depending on how frequently the system is used).

Specifications (Dimensions see layout)

• Drive-through length	316 in
• Passage width	110 in
• Maximum axle load	16.5 tons
• Splash guard wall height	54 in
• Nozzles	2×130 pcs
• Nozzle Ø	0.28 in
• Recycling tank volume	2×4760 gal
• Maximum pumping capacity	4×660 gal/min
• Electrical connection value	30.0 HP
• Sound emission	< 75 dB
• Weight (ready to ship)	12.7 tons

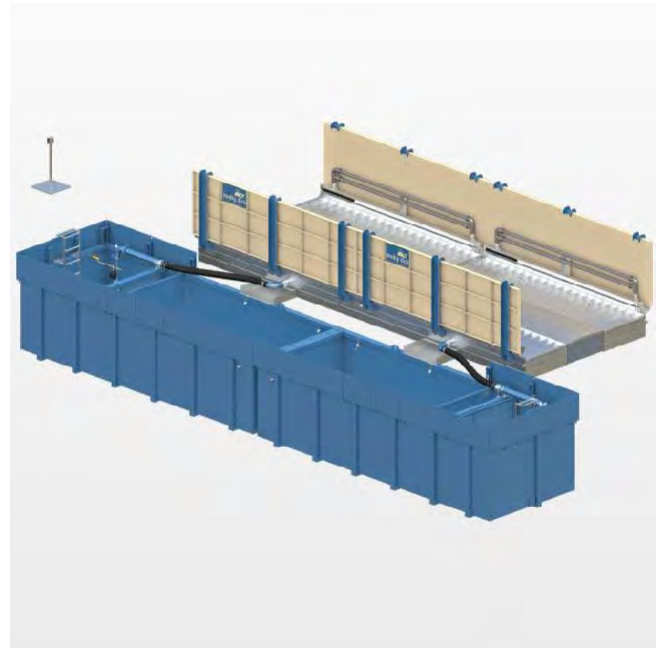

Scope of supply

- 2×1 Galvanized, water-bearing wash unit
- Splash guard wall per side
- 2×1 Double side nozzle bars per side
- 2×1 Galvanized return channel for the waste water
- 2×1 Control cabinet with connection cable
- Optical sensor to trigger the washing process
- 2×2 MobyPump submersible pumps
- Pump bracket and piping
- 2×1 Recycling tank 20 B with entry ladder
- Edge elevation on recycling tanks to end at ground level

Fields of application

The KIT Flex 800 B model can wash up to 200 highly soiled trucks per day.

Typical operation sites – depending on the number of trucks and degree of soiling – are

- Construction sites
- Gravel pits and quarries
- Concrete mixing plants
- Recycling facilities
- Landfill sites
- Port facilities
- Food industry
- Cleaning and disinfection
- Other areas on request

Wheel washing system

MobyDick ConLine KIT Flex 800 C

Art. no. MDK-A300-800C

Two galvanized, water-bearing wash units with splash guard walls, recycling tanks with scraper conveyors, pump technology, and a control system.



KIT Flex 800 C – A model from the ConLine KIT Flex range

ConLine KIT Flex – The modular concept for the construction industry

The wheel washing systems of the ConLine KIT Flex line were developed by our engineers specifically for the needs of the construction industry. The basic unit of the modular concept consists of a robust 158 inch long wash unit and a recycling tank. It can be combined with a scraper conveyor, a mobility package or a second basic unit to form eight different wheel washing systems that are 158 or 316 inch in length. All models can be installed quickly and impress thousands of operators around the world.

Function description

A truck drives slowly into the wheel washing system. The vehicle identification sensor automatically triggers the washing process. The specially coordinated nozzle system, consisting of a large number of bottom and side nozzles, then ensures the intensive cleaning of all tires and the entire chassis in two wheel rotations. Higher vehicle areas such as windows and rear-view mirrors are not washed, to leave the driver's field of vision clear. The kneading effect created by the angle profiles gives the tire profiles additional cleaning. The duration of the washing process can be freely selected using the timer relay in the control cabinet, in accordance with the relevant operating conditions. The waste water runs from the wash unit directly into the recycling tank below. This is where the washed-off solids settle out. The water is fed via the partition wall with sieve insert into the pump chamber. There it is reused by a robust MobyPump submersible pump for further spraying. The scraper conveyor conveys settled solids out of the recycling tank.




Water recycling

In all MobyDick wheel washing systems the water is circulated in a closed circuit. Water treatment is via sedimentation in the recycling tank. Sedimentation can be accelerated by adding a flocculant. Settled solids are continuously conveyed out of the recycling tank by the scraper conveyor.

Specifications (Dimensions see layout)

• Drive-through length	316 in
• Passage width	110 in
• Maximum axle load	16.5 tons
• Splash guard wall height	54 in
• Nozzles	2x130 pcs
• Nozzle Ø	0.28 in
• Recycling tank volume	2x4760 gal
• Maximum pumping capacity	4x660 gal/min
• Electrical connection value	30.8 HP
• Sound emission	< 75 dB
• Weight (ready to ship)	13.8 tons

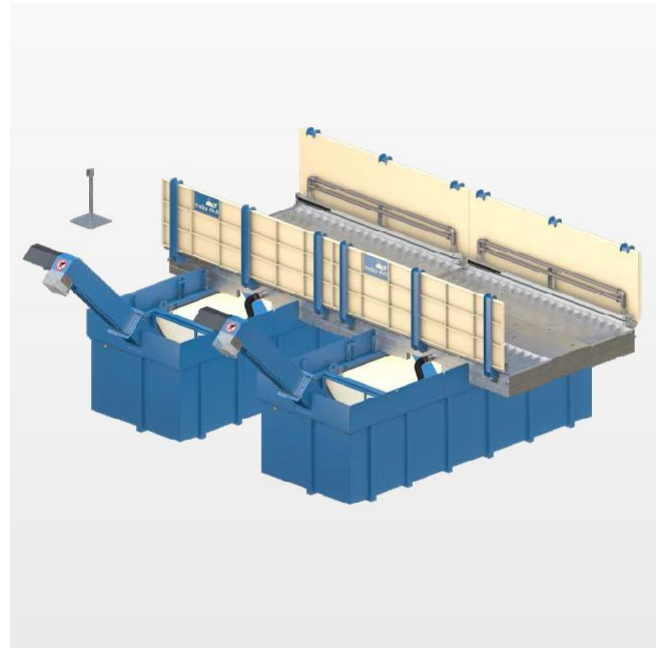

Scope of supply

- 2x1 Galvanized, water-bearing wash unit
- Splash guard wall per side
- 2x1 Double side nozzle bars per side
- 2x1 Control cabinet with connection cable
- Optical sensor to trigger the washing process
- 2x2 MobyPump submersible pumps
- Pump bracket and piping
- 2x1 Recycling tank 20 C with scraper conveyor
- Edge elevation on recycling tanks to end at ground level

Fields of application

The KIT Flex 800 C model can wash up to 200 highly soiled trucks per day.


Typical operation sites – depending on the number of trucks and degree of soiling – are

- Construction sites
- Gravel pits and quarries
- Concrete mixing plants
- Recycling facilities
- Landfill sites
- Port facilities
- Food industry
- Cleaning and disinfection
- Other areas on request

Wheel washing system MobyDick ConLine KIT Flex 800 MB

Art. no. MDK-A300-800MB

Two mobile, galvanized, water-bearing wash units with splash guard walls, pump sump tanks, recycling tanks, pump technology, solid concrete ramps, and a control system.

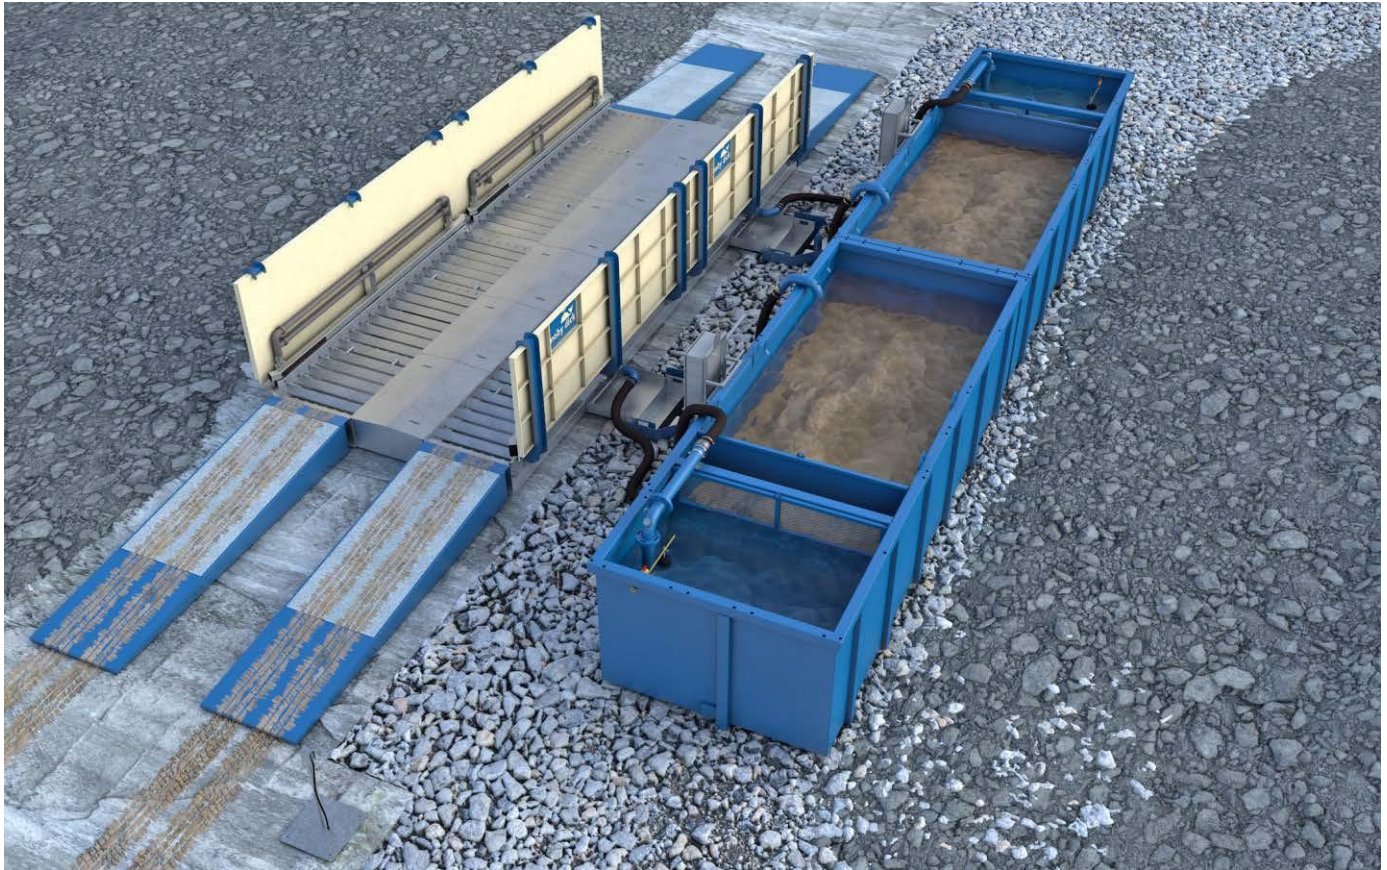

KIT Flex 800 MB – A model from the ConLine KIT Flex range

ConLine KIT Flex – The modular concept for the construction industry

The wheel washing systems of the ConLine KIT Flex line were developed by our engineers specifically for the needs of the construction industry. The basic unit of the modular concept consists of a robust 158 inch long wash unit and a recycling tank. It can be combined with a scraper conveyor, a mobility package or a second basic unit to form eight different wheel washing systems that are 158 or 316 inch in length. All models can be installed quickly and impress thousands of operators around the world.

Function description

A truck drives slowly up the ramps into the wheel washing system. The vehicle identification sensor automatically triggers the washing process. The specially coordinated nozzle system, consisting of a large number of bottom and side nozzles, then ensures the intensive cleaning of all tires and the entire chassis in two wheel rotations. Higher vehicle areas such as windows and rear-view mirrors are not washed, to leave the driver's field of vision clear. The kneading effect created by the angle profiles gives the tire profiles additional cleaning. The duration of the washing process can be freely selected using the timer relay in the control cabinet, in accordance with the relevant operating conditions. The waste water runs via the return channel from the wash units to the side pump sump tanks. From there it is pumped into the recycling tanks by a MobyPump agitator pump. This is where the washed-off solids settle out. The water is fed under a surge wall and over the partition wall with sieve insert into the pump chamber. There it is reused by a robust MobyPump submersible pump for further spraying. An excavator or suction vehicle removes the settled solids from the recycling tanks.




Water recycling

In all MobyDick wheel washing systems the water is circulated in a closed circuit. Water treatment is via sedimentation in the recycling tank. Sedimentation can be accelerated by adding a flocculant. The solids that settle out in the recycling tank should be extracted with an excavator or suctioned out with a suction vehicle at regular intervals (depending on how frequently the system is used).

Specifications (Dimensions see layout)

• Drive-through length	316 in
• Passage width	110 in
• Maximum axle load	16.5 tons
• Splash guard wall height	54 in
• Nozzles	2x130 pcs
• Nozzle Ø	0.28 in
• Recycling tank volume	2x4760 gal
• Maximum pumping capacity	4x660 gal/min
• Electrical connection value	30.0 HP
• Sound emission	< 75 dB
• Weight (ready to ship)	24.8 tons

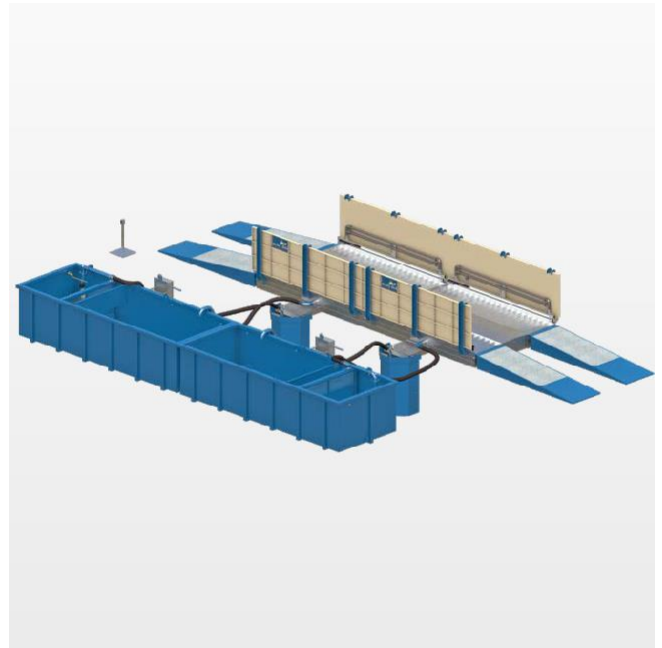

Scope of supply

- 2x1 Galvanized, water-bearing wash unit
- Splash guard wall per side
- 2x1 Double side nozzle bars per side
- 2x1 Galvanized return channel for the waste water
- 2x1 Control cabinet with connection cable
- Optical sensor to trigger the washing process
- 2x1 MobyPump submersible pump
- 2x1 MobyPump agitator pump
- Pump bracket and piping
- 2x1 Recycling tank 20 B
- 2x1 Pump sump tank
- 4 Ramps to the wash units

Fields of application

The KIT Flex 800 MB model can wash up to 150 highly soiled trucks per day.

Typical operation sites – depending on the number of trucks and degree of soiling – are


- Construction sites
- Gravel pits and quarries
- Concrete mixing plants
- Recycling facilities
- Landfill sites
- Port facilities
- Food industry
- Cleaning and disinfection
- Other areas on request

Wheel washing system

MobyDick ConLine KIT Flex 800 MC

Art. no. MDK-A300-800MC

Two mobile, galvanized, water-bearing wash units with splash guard walls, pump sump tanks, recycling tanks with scraper conveyors, pump technology, solid concrete ramps, and a control system.

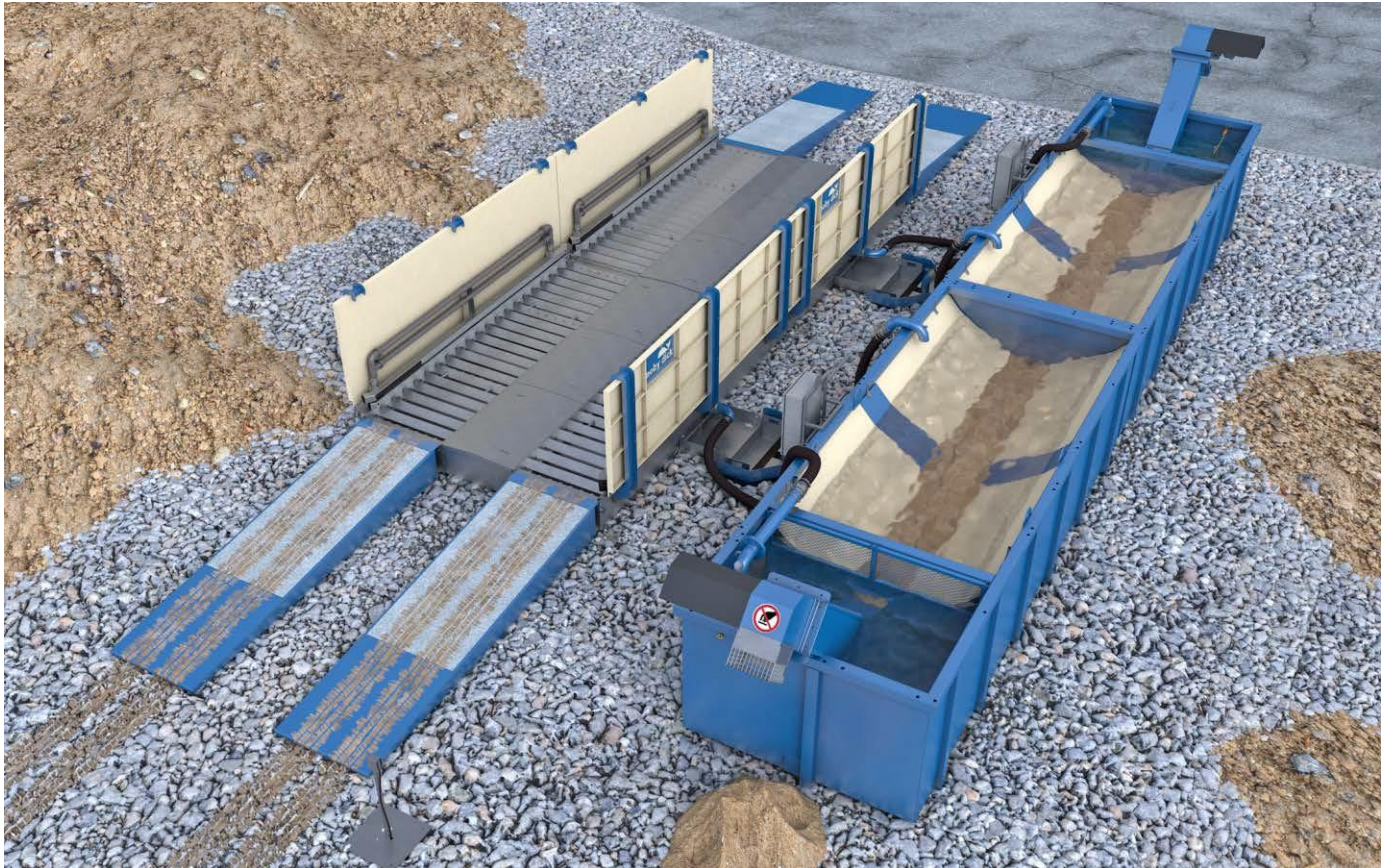


KIT Flex 800 MC – A model from the ConLine KIT Flex range

ConLine KIT Flex – The modular concept for the construction industry

The wheel washing systems of the ConLine KIT Flex line were developed by our engineers specifically for the needs of the construction industry. The basic unit of the modular concept consists of a robust 158 inch long wash unit and a recycling tank. It can be combined with a scraper conveyor, a mobility package or a second basic unit to form eight different wheel washing systems that are 158 or 316 inch in length. All models can be installed quickly and impress thousands of operators around the world.

Function description

A truck drives slowly up the ramps into the wheel washing system. The vehicle identification sensor automatically triggers the washing process. The specially coordinated nozzle system, consisting of a large number of bottom and side nozzles, then ensures the intensive cleaning of all tires and the entire chassis in two wheel rotations. Higher vehicle areas such as windows and rear-view mirrors are not washed, to leave the driver's field of vision clear. The kneading effect created by the angle profiles gives the tire profiles additional cleaning. The duration of the washing process can be freely selected using the timer relay in the control cabinet, in accordance with the relevant operating conditions. The waste water runs via the return channel from the wash units to the side pump sump tanks. From there it is pumped into the recycling tanks by a MobyPump agitator pump. This is where the washed-off solids settle out. The water is fed via the partition wall with sieve insert into the pump chamber. There it is reused by a robust MobyPump submersible pump for further spraying. The scraper conveyor conveys settled solids out of the recycling tank.

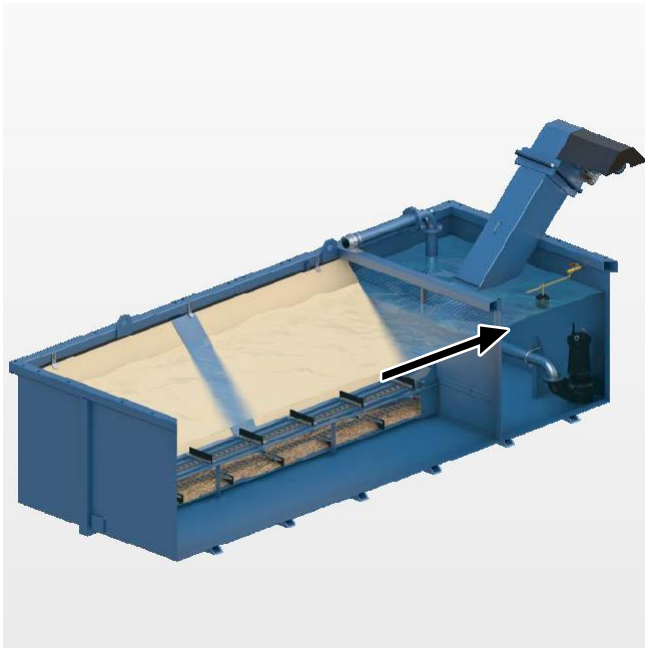


Water recycling

In all MobyDick wheel washing systems the water is circulated in a closed circuit. Water treatment is via sedimentation in the recycling tank. Sedimentation can be accelerated by adding a flocculant. Settled solids are continuously conveyed out of the recycling tank by the scraper conveyor.

Specifications (Dimensions see layout)

• Drive-through length	316 in
• Passage width	110 in
• Maximum axle load	16.5 tons
• Splash guard wall height	54 in
• Nozzles	2x130 pcs
• Nozzle Ø	0.28 in
• Recycling tank volume	2x4760 gal
• Maximum pumping capacity	4x660 gal/min
• Electrical connection value	30.8 HP
• Sound emission	< 75 dB
• Weight (ready to ship)	25.9 tons

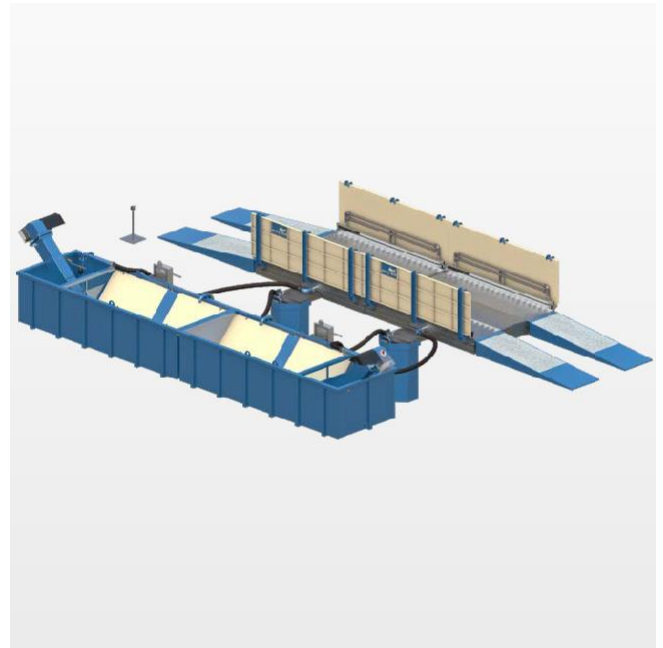

Scope of supply

- 2x1 Galvanized, water-bearing wash unit
- Splash guard wall per side
- 2x1 Double side nozzle bars per side
- 2x1 Galvanized return channel for the waste water
- 2x1 Control cabinet with connection cable
- Optical sensor to trigger the washing process
- 2x1 MobyPump submersible pump
- 2x1 MobyPump agitator pump
- Pump bracket and piping
- 2x1 Recycling tank 20 C with scraper conveyor
- 2x1 Pump sump tank
- 4 Ramps to the wash units

Fields of application

The KIT Flex 800 MC model can wash up to 150 highly soiled trucks per day.

Typical operation sites – depending on the number of trucks and degree of soiling – are

- Construction sites
- Gravel pits and quarries
- Concrete mixing plants
- Recycling facilities
- Landfill sites
- Port facilities
- Food industry
- Cleaning and disinfection
- Other areas on request