


Recycling tank 50DCC

Art. no. —

Painted steel recycling tank with two twin scraper conveyors.

Illustrations may differ from the actual scope of delivery

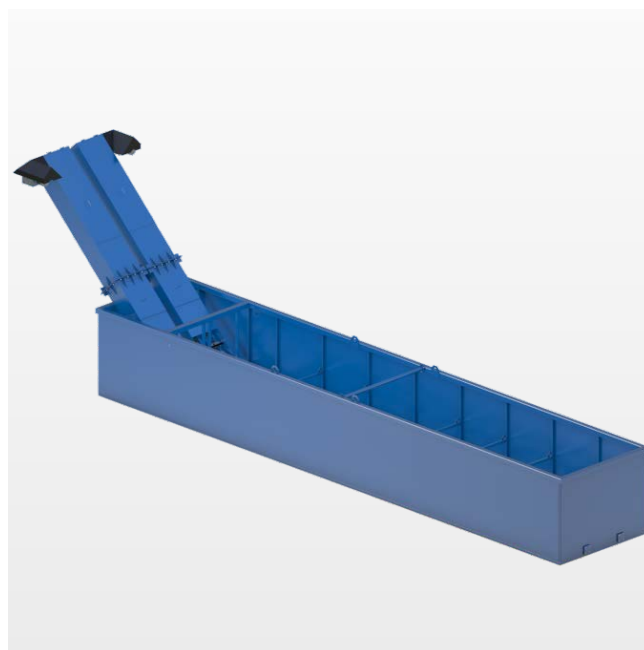

Function

The washed-off solids settle out in the recycling tank. The two integrated twin scraper conveyors convey settled sludge from the recycling tank. It is recommended to use the Moby-Dos Compact flocculant dosing system (optional).

Technical description

Recycling tank consisting of a solid steel structure with profile frame (5 mm) and steel plates. Surface treatment by chemical cleaning, primer 60 µ and top coat 60 µ Traffic blue (RAL 5017). Two integrated twin scraper conveyors consisting of gear motor, drive and deflection shafts, conveyor chains with dirt scrapers and guide rails. Three drain covers for easy emptying of the tank. The tank construction allows it to sustain all the forces generated by a passing loaded lorry even when empty.

Specifications

• Dimensions (H×W×L)	400×220×1356 cm
• Dimensions recycling tank (H×W×L)	165×220×1160 cm
• Ejection height (above recycling tank) *	180 cm
• Electrical connection values	2×0.75 kW/3.1 A
• Weight (ready to ship) *	6800 kg
• Material	Steel
• Colour	Traffic blue (RAL 5017)

* in accordance with "Technical description"

General scope of supply

- Recycling tank
- 2 twin scraper conveyors
- Additional components dependent on recycling tank design, for example: baffle, level control, rim elevations, tank connections